


## DMX BACK UP

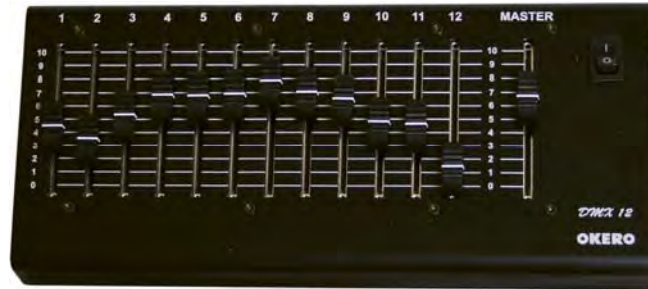

### Save a lighting preset to the OKERO backup unit

1. Connect your programming controller to "DMX in" on the backup unit.
2. On the backup unit: Set all faders to **0%** and the Master to **100%**.
3. Set your desired lighting "Preset 1" on the programming controller.
4. Select on which backup unit fader to store this preset (Eg: Fader 1).
5. Take this fader up to **100%** and then down to **0%**.  
*(This operation must not take longer than 3 seconds).*
6. Now this preset is saved on "Fader 1" on the backup unit. Switch off or disconnect the programming controller. You can now run your "Preset 1" from the backup unit.
7. Repeat steps 1-6 to program the rest of the faders on the backup unit.